


Fibron

Fibron Cable Data Sheet

Video Cable (NC13 type)

DCS0011

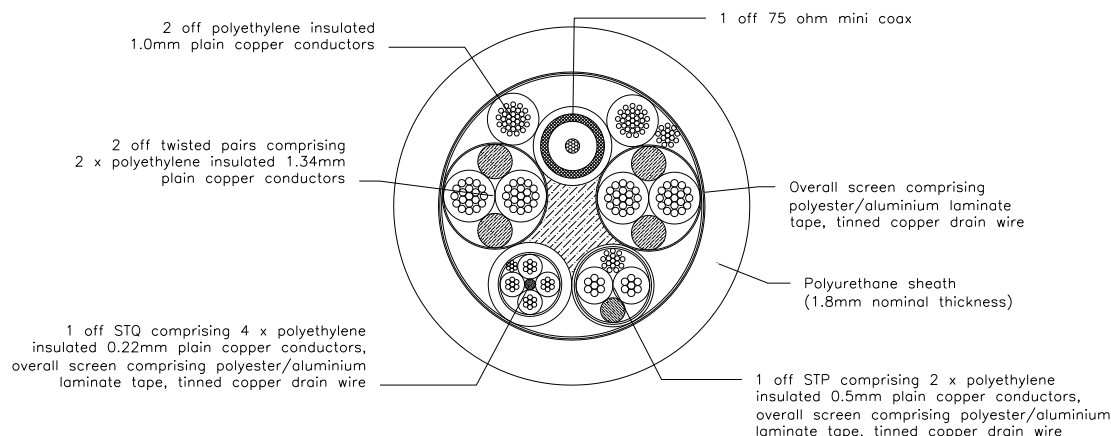

Weights, dimensions & mechanical characteristics

Outside diameter	14.5	mm
Weight in air	263.5	kg/km
Weight in sea water (Assuming sea water density = 1,026 kg/m ³)	95	kg/km
Density	1,595	kg/km
Minimum bend radius (static)	95	mm
Minimum bend radius (dynamic)	145	mm
Minimum break strength	n/a	

Electrical characteristics

1.34mm² TP	Conductor resistance @ 20°C	15.0 Ω/Km (maximum)
	Resistance (core – core)	1000 MΩ/Km (minimum)
	Resistance (core – screen)	500 MΩ/Km (minimum)
	Operating voltage	500 V (maximum)
0.5mm² STP	Conductor resistance @ 20°C	41.0 Ω/Km (maximum)
	Resistance (core – core)	1000 MΩ/Km (minimum)
	Resistance (core – screen)	500 MΩ/Km (minimum)
	Operating voltage	500 V (maximum)
0.22mm² STQ	Conductor resistance @ 20°C	92.5 Ω/Km (maximum)
	Resistance (core – core)	1000 MΩ/Km (minimum)
	Resistance (core – screen)	500 MΩ/Km (minimum)
	Operating voltage	500 V (maximum)
1.34mm² Single Core	Conductor resistance @ 20°C	20.5 Ω/Km (maximum)
	Operating voltage	500 V (maximum)
Mini Coax	Conductor resistance (inner) @ 20°C	142.0 Ω/Km (maximum)
	Conductor resistance (outer) @ 20°C	34.5 Ω/Km (maximum)
	Impedance	75 Ω

