

HYDRAULIC IMPACT WRENCH


DHW 3034 - DHW 301 - DHW 501

kg 7,6



Available

cod.	DHW 3034	DHW 301	DHW 501
Anvil Length	113 mm	137 mm	137 mm
Weight	8,25 kg	8,7 kg	8,25 kg

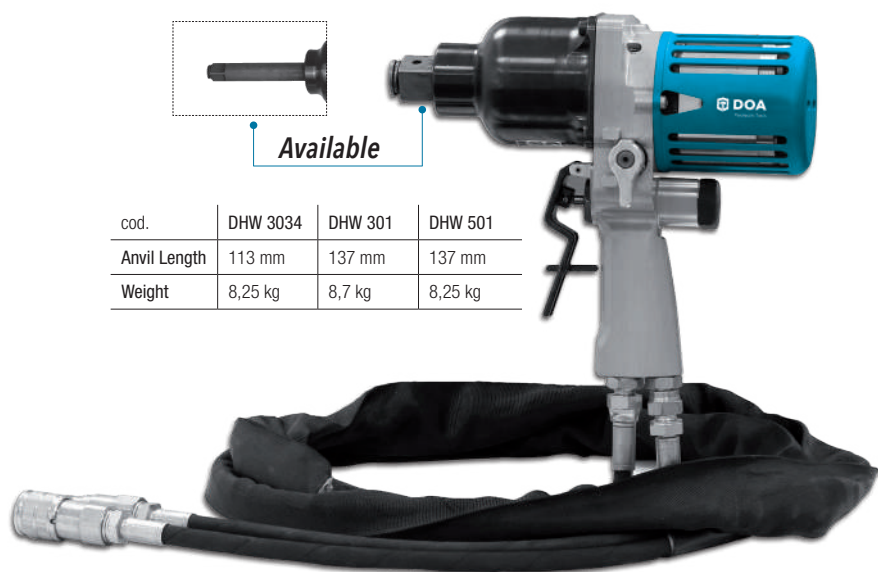

Available in
underwater version

Ideal for: mechanical and industrial workshops, infrastructures and railway applications, oil&gas, mining and cold workplaces when no air supply is available.

TECHNICAL CHARACTERISTICS	DHW 3034	DHW 301	DHW 501
Weight (kg)	7,6	7,7	8,8
Square drive	3/4"	1"	1"
Bolt range	M14 - M24	M18 - M33	M18 - M36
Max torque	3000 Nm	3000 Nm	5000 Nm
Free speed	2800 rpm	2800 rpm	1700 rpm
Max oil flow	20-30L/min	20-30L/min	20-30L/min
Length	288,88 mm	288,8 mm	323,4 mm
Side to center	62 mm	57 mm	57 mm



- *Torque control: adjustable torque up to 3000-5000 Nm, for the hardest bolts.*
- *3-jaw hammer mechanism type*
- *Motor cover with heat dissipation*
- *Rotation inverter*
- *Handle entirely made in Ergal*
- *Ergonomic handle with integrated oil flow*
- *Mechanical trigger with safety lever*