

Gemini 620pd

Multibeam Profiling Sonar



Applications

- Oceanographic surveys
- Bathymetric surveys
- Pipe / Trench surveying
- Dredging and rock-dump surveys

The Gemini 620pd benefits from the latest technological advances in signal processing. These allow the 620pd to produce high performance bathymetry data, which can be output to industry recognized survey packages for processing. Designed for Remotely Operated Vehicle (ROV) mounting, the Gemini 620pd is manufactured in titanium and rated to an operational depth of 4000m.

Benefits

- High resolution performance
- 130° swath
- 4000m Titanium housing
- Ease of installation

Features

- Ethernet or VDSL communication
- Compatible with industry survey packages
- Automatic bottom tracking
- Roll correction

Operating at 620kHz the Gemini 620pd is able to provide 10mm range resolution results with an angular resolution of 1° over a maximum swathe of 130°. The Gemini 620pd is able to deal with more varied environments, while continuing to provide high accuracy performance.

The Gemini 620pd software has been designed to provide the user with the ability to easily and effectively optimise the performance of the system. Automatic bottom tracking, variable gate setting, gate tilting as well as roll compensation are some of the automated features that ensure a survey can be completed, with minimal user interaction during operation.

Users can choose from a selection of beam patterns, allowing the 620pd to be used in a wide variety of survey applications. A Gemini Hub enables the user to connect up to 2 Gemini 620pd heads. The Gemini Hub is connected to a PC or laptop and ensures data from other survey systems (i.e. GPS, Gyro, MRU and SVS) are accurately synchronised.

Key Specification	
Operating frequency	620kHz
Angular resolution	1.0° acoustic, 0.5° effective
Scanning sector	130°
Range	0.5 to 120m
Dimensions	474mm x 170mm / 18.67in x 6.70in
Weight in water	13.00kg /28.67lbs

Acoustic Specifications	
Operating frequency	620kHz
Angular resolution	1.0° acoustic, 0.5° effective
Scanning sector	130°
Number of beams	256
Vertical beamwidth	1°
Range	0.5 to 120m
Scan rate	5-50Hz (inter-ping time dependent)
Range resolution	10mm (range dependent)
Pulse length	25 - 200µs (range dependent)


Electrical and Communication

Supply voltage	22 - 75V DC
Power consumption	37W max (range dependent, head unit only)
Data communications	Ethernet (up to 80m) or VDSL (up to 500m)
Connector type	Burton 5506 series
VDSL cable length	Maximum length for VDSL and power is 300m, if power is provided locally the maximum length for VDSL communication is 500m

Physical specification

Depth rating	4000m / 13,124ft
Weight in air	19.00kg / 41.89lbs
Weight in water	3.00kg / 28.67lbs
Temperature rating (operating)	-10°C to 35°C / 14°F to 95°F
Temperature rating (storage)	-20°C to 50°C / 4°F to 122°F

Specification subject to change in line with Tritech's policy of continual product development

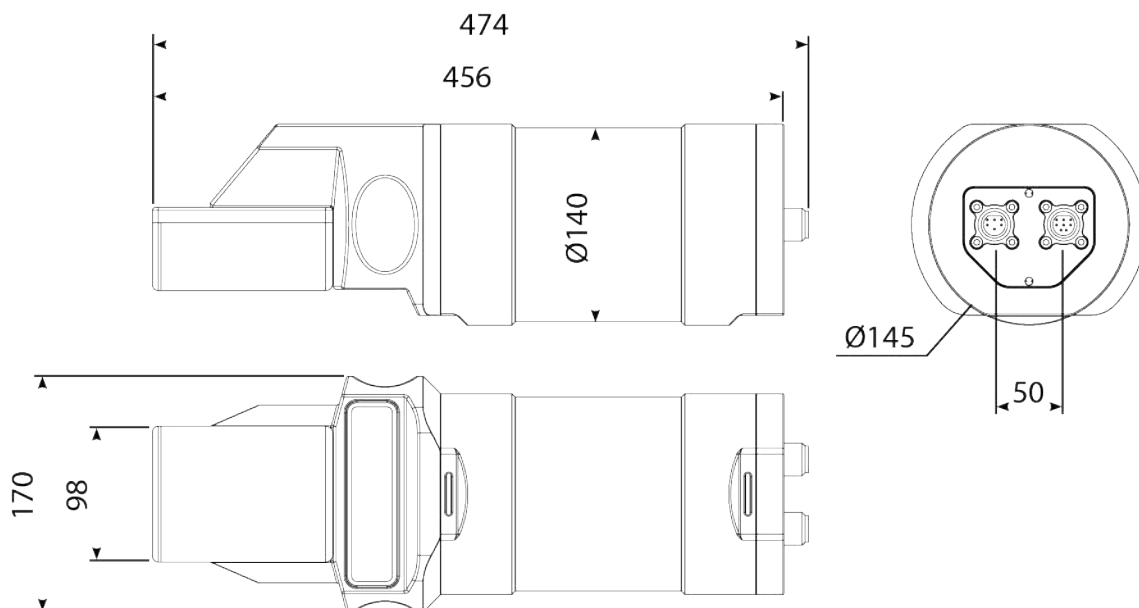

Not to scale. Measurements in mm.

Tritech International Limited

Peregrine Road, Westhill Business Park
Westhill, Aberdeenshire AB32 6JL
United Kingdom
Email: sales@tritech.co.uk
Tel: +44 (0)1224 744111
Marketed by:

0695-SOM-00002 Issue 10

