


# SM20 SUBMERSIBLE PUMP

# STANLEY



The **SM20** Submersible Pump is a light weight, self priming hydraulic dewatering pump with 2½" NPFT discharge. With a capacity of 250 gpm, this pump is good for quick dewatering jobs. The **SM20** is the smallest pump in our line up of five different models. See chart below for **SM20** gpm capacity.

## SM20 PERFORMANCE GRAPH (SM20531, \*SM20521)

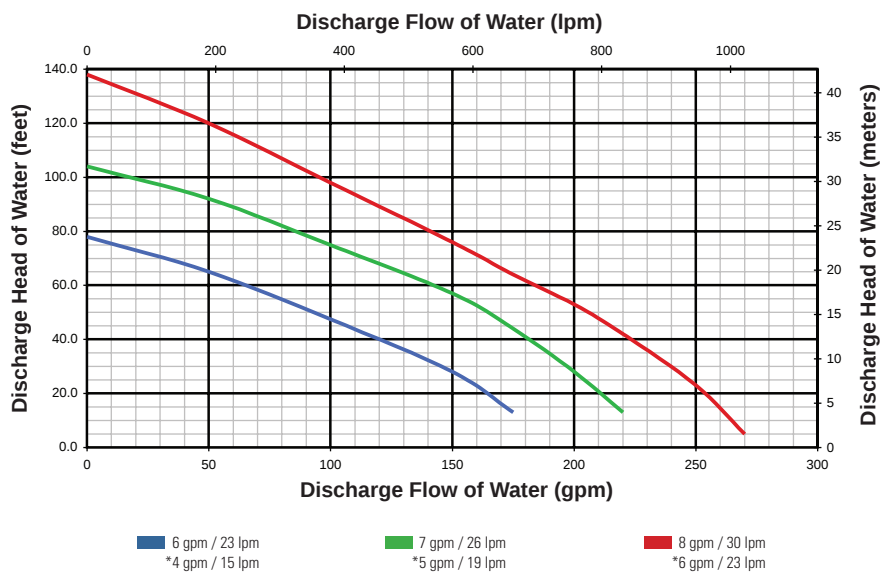

## SPECIFICATIONS

|                            |                            |
|----------------------------|----------------------------|
| <b>Capacity</b>            | 2½" NPFT Discharge         |
| <b>Performance</b>         | 250 gpm / 946 lpm          |
| <b>Flow Range</b>          | 4-9 gpm / 15-34 lpm        |
| <b>Working Pressure</b>    | 1000-2000 psi / 70-140 bar |
| <b>Full Relief Setting</b> | 2250 psi / 155 bar         |
| <b>Weight</b>              | 13.7 lbs / 6.3 kg          |
| <b>Length</b>              | 7½" / 19 cm                |
| <b>Width</b>               | 9.6" / 24 cm               |
| <b>Hydraulic Ports</b>     | -8 SAE O-ring              |
| <b>Connection</b>          | ¾" Male Pipe Adapter       |
| <b>Couplers</b>            | Yes                        |
| <b>Hose Whips</b>          | No                         |

## FEATURES

- Stanley Hyrevz gear motor
- Stainless Steel fasteners
- Submersible and Self Priming
- Can run dry without damage
- Urethane or steel impeller
- 250 gpm (946 lpm)
- 2½" discharge
- CE Certified



# SM20 SUBMERSIBLE PUMP

**STANLEY**

## ORDERING INFORMATION

### PART NUMBER

|                  |                                                                                              |
|------------------|----------------------------------------------------------------------------------------------|
| <b>SM2043101</b> | Submersible Pump, 8 gpm, steel impeller, 250 gpm, output, 2½" NPTF, with FF couplers         |
| <b>SM2052101</b> | Submersible Pump, CE, 5 gpm, urethane impeller, 250 gpm, output, 2½" NPTF, with FF couplers  |
| <b>SM2053101</b> | Submersible Pump, CE, 8 gpm, urethane, impeller, 250 gpm, output, 2½" NPTF, with FF couplers |


### ACCESSORIES

|              |                                         |
|--------------|-----------------------------------------|
| <b>03971</b> | Flush-Face Coupling Set, ¾" NPT         |
| <b>03974</b> | Flush-Face Coupling Set, ½" NPT         |
| <b>06830</b> | Hose Whip 18" long, -8 SAE x ½" NPT     |
| <b>31848</b> | Dual Hose, 50' x ½", with couplers      |
| <b>31972</b> | Dual Hose, 25' x ½", with couplers      |
| <b>58633</b> | Twinned Hose, 25' x ½", with couplers   |
| <b>58634</b> | Twinned Hose, 50' x ½", with couplers   |
| <b>02183</b> | Fire Hose, 25' x 2½" Diameter           |
| <b>02317</b> | Fire Nozzle, 1" Output                  |
| <b>05133</b> | 2½" Threaded Adapter, Pump to Fire Hose |
| <b>05134</b> | Fire Hose, 50' x 2½" Diameter           |
| <b>05135</b> | Spanner Wrench for Pin Lug Coupler      |

When hydraulic hose exceeds 100' (30.4 m) in length, increase I.D. of both pressure and return hose. For more information, consult Stanley Hydraulic Tools.

### IMPORTANT

To fill out a Product Warranty Recording form and for information on your warranty visit [stanleyhydraulic.com](http://stanleyhydraulic.com) and select the Warranty tab.

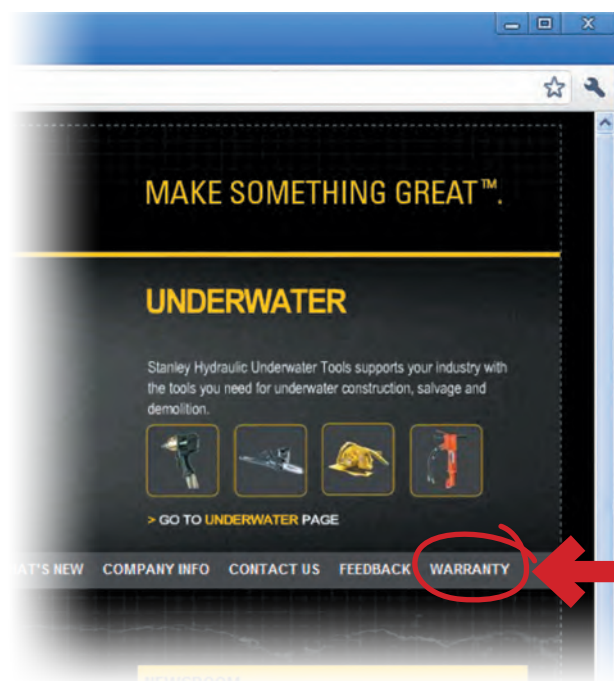

**Note:** The warranty recording form must be submitted to validate the warranty.

All Stanley Hydraulic Tools, parts, accessories and allied equipment are subject to design improvements, specifications and price changes at any time without notice and with no obligation to units already sold. Weights, dimensions and operating specifications listed herein are subject to change without notice. Where specifications are critical to your applications, please consult Stanley Hydraulic Tools.